

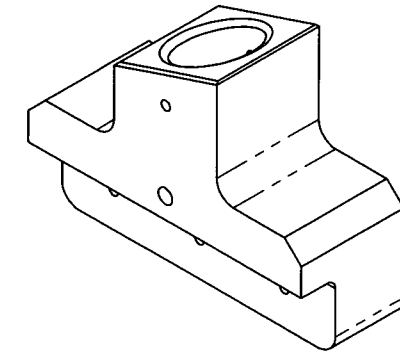
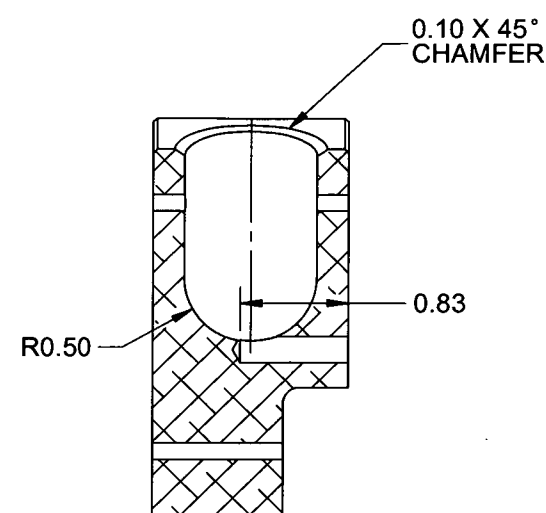



D4893-2

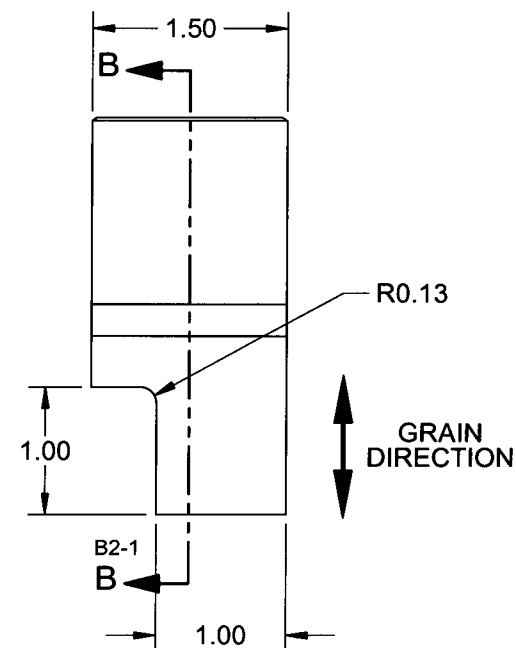

D4893-1

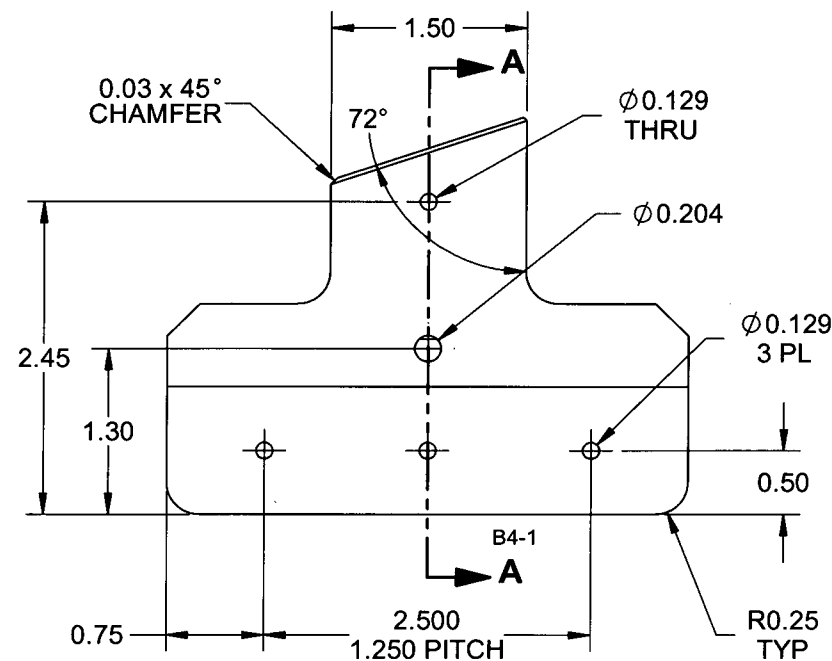

SECTION A-A B7-1

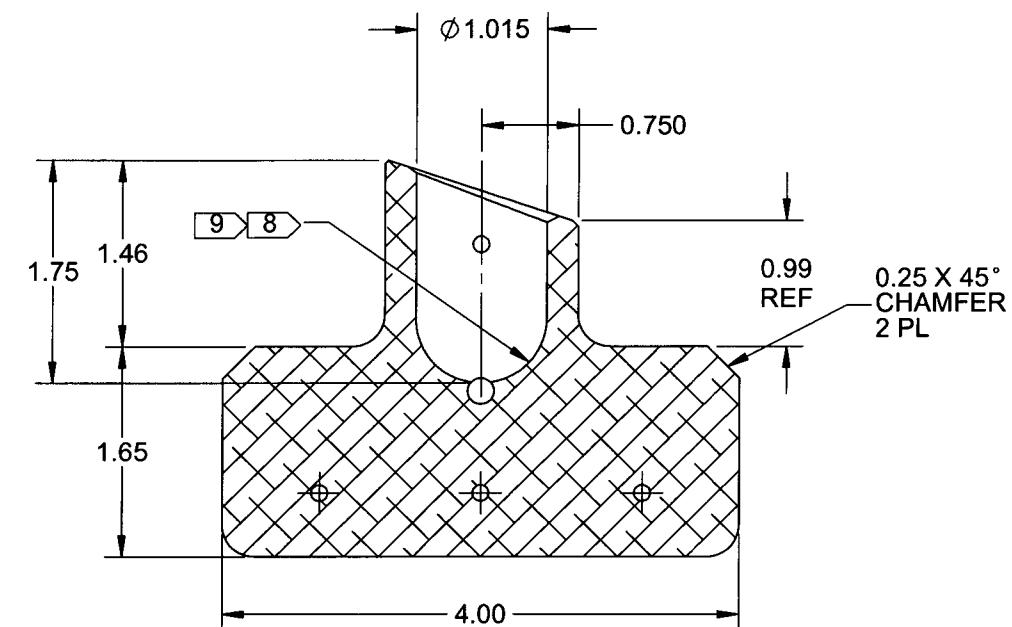

SECTION B-B B6-1

D4893-1 HARDPOINT ADAPTER, LH
D4893-2 HARDPOINT ADAPTER, RH OPPOSITE

NOTES:

- 1) MATERIAL: 6061-T6/T651/T6510/T6511/T62 ALUMINUM BAR
PER QQ-A-225/8 OR AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
OR QQ-A-200/8 OR AMS-QQ-A-200/8 (OR AMS 4160)
OR ASTM B211 OR ASTM B221
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
POWDER COAT WHITE (4.3.5.1) PER DART QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
- 7) WEIGHT: 0.92 lbs
- 8) SURFACE FINISH 80-125 uin. IN THE BOTTOM OF THE $\phi 1.015$ BORE IS ACCEPTABLE
- 9) MASK $\phi 1.015$ BORING HOLE PRIOR TO POWDER COAT

RELEASED
2013-06-12
WJ

A	NEW ISSUE	RF	13.05.24
REV.	DESCRIPTION	BY	DATE
DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	RF	DRAWING NO.	REV. A
MFG. APPR.	RF	D4893	SHEET 1 OF 1
APPROVED	RF	TITLE	SCALE
DE APPR.	RF	HARDPOINT ADAPTER	NTS
DATE	13.05.24	COPYRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	